


WJ21(A/D),WJ31(D/A) Products pairing setting Description

Setting WJ21 steps:

1.Connect power supply line and communication line(485/232),PIN3 and PIN6 short connected (as shown in the pictures below)

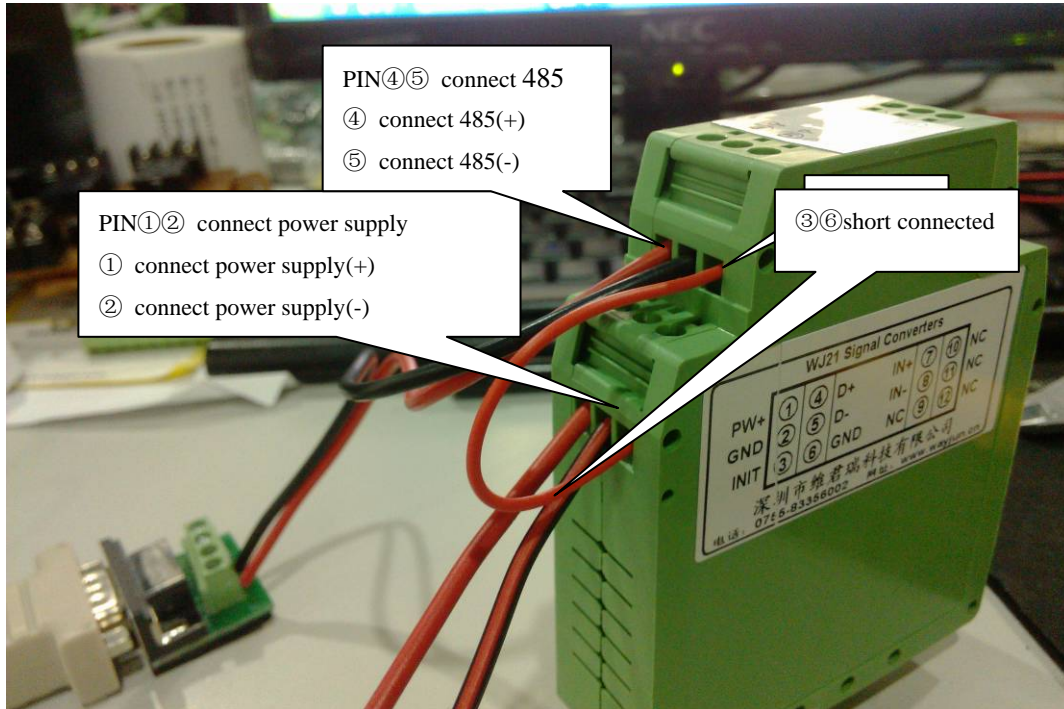


2.Open software “WAYJUN Test” ,select communication serial port and baud rate,input command “\$00H1” ,click“Send” ,check whether “Response” shows !00.(If no response,please check connection and communication interface)




Setting WJ31 steps:

1.Connect power supply line and communication line(485/232),PIN3 and PIN6 short connected (as shown in the pictures below)

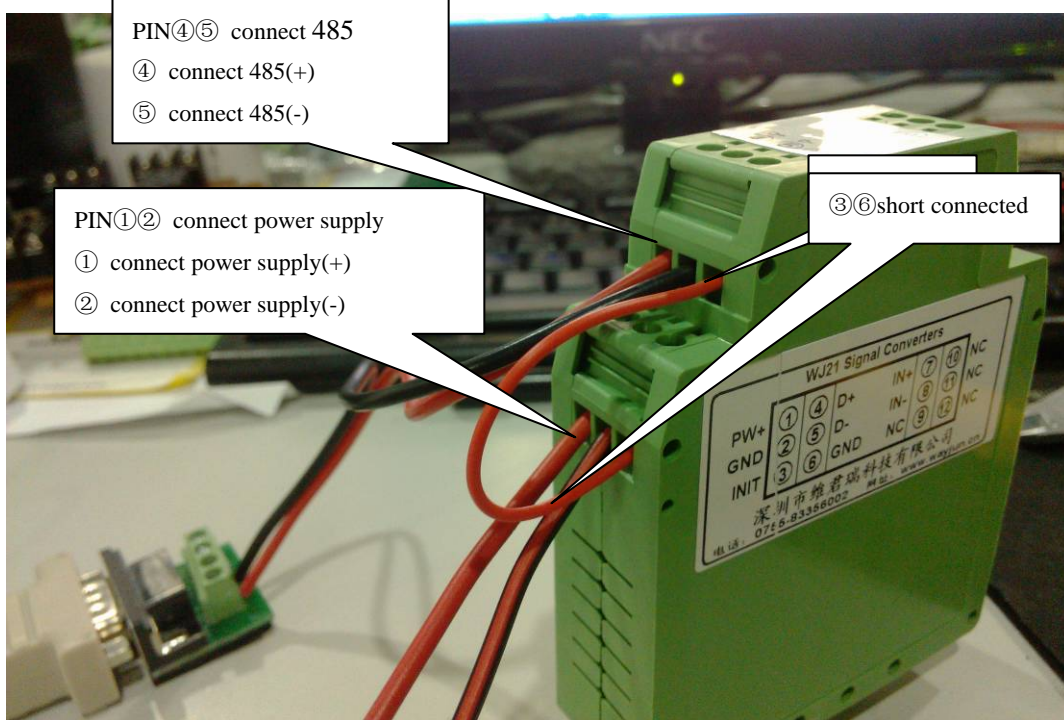

2.Open software “WAYJUN Test”,select communication serial port and baud rate,input command “\$00P1”,click“Send”,check whether “Response” shows !00.(If no response,please check connection and communication interface)

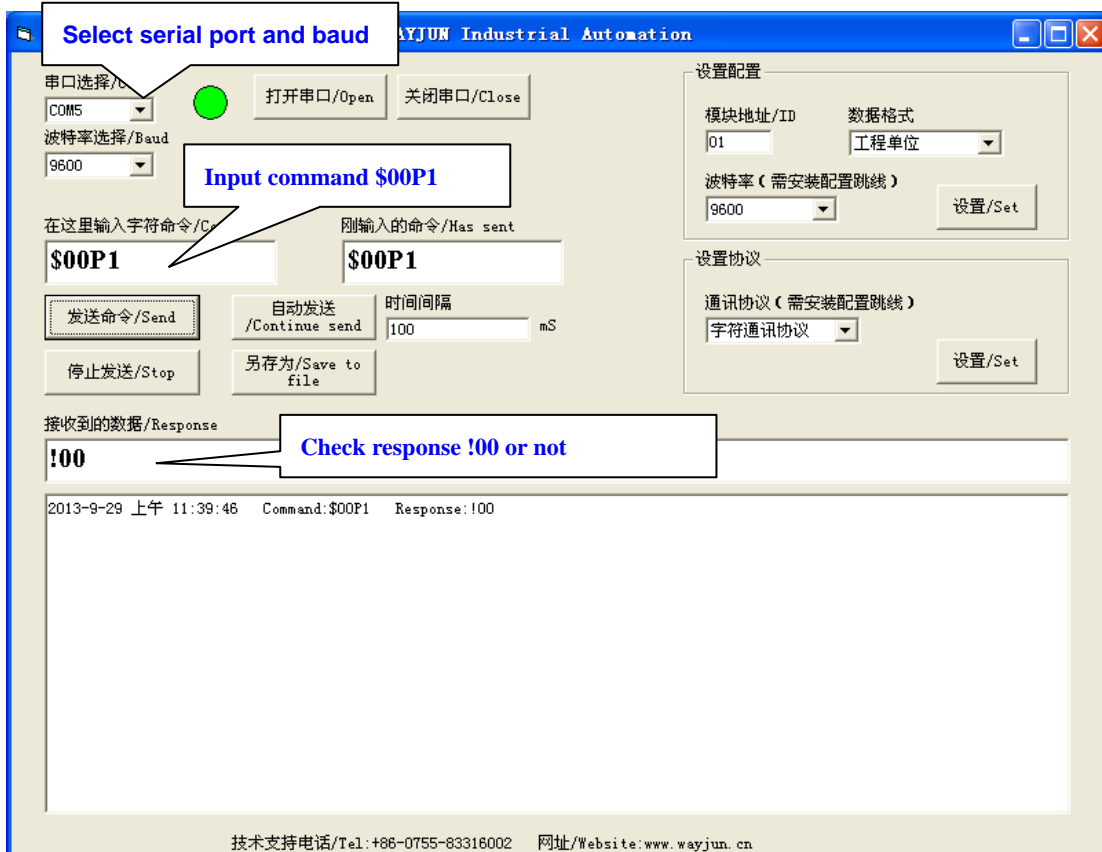

Complete the above setting, then put WJ21 PIN④⑤ connect to WJ31 PIN④⑤

